




4. Use a screwdriver to move the locking tab down while you press the module flush onto the DIN rail. Release the locking tab to secure the module in place. If necessary, push up on the locking tab to secure the module in place.

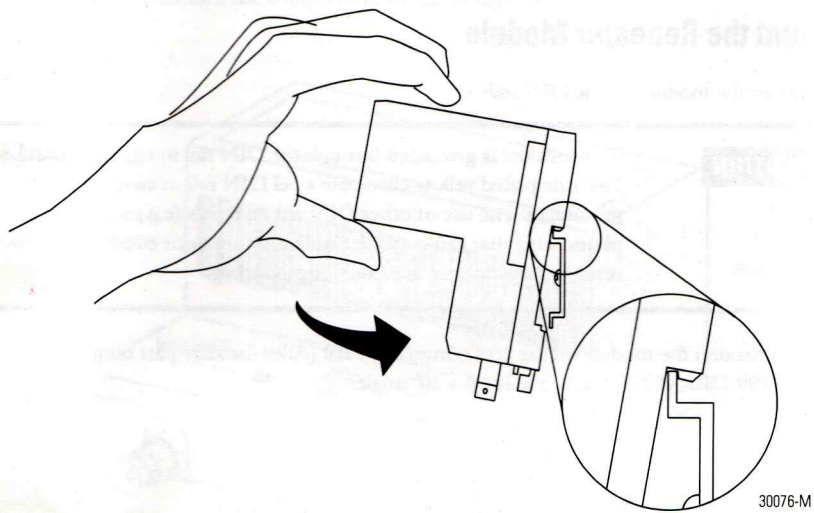